



Configuration:



- Touch screen for operation function, easy to operate and learn.
- Adopts Yaskawa brand from Japan servo motor system, Through the high-speed bus control mode, ensure the machine high-speed and stable.

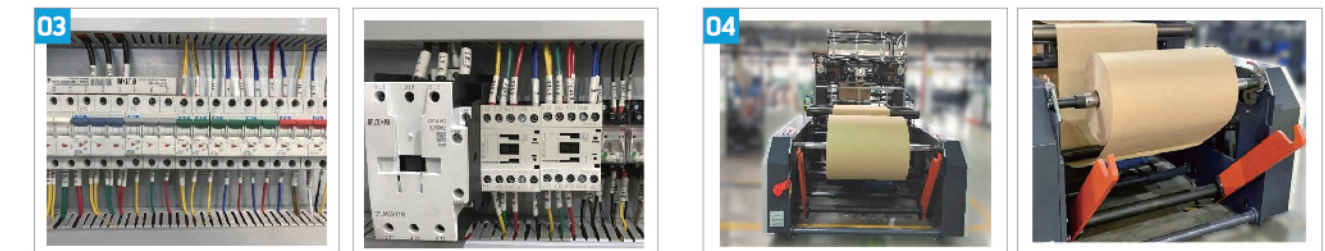

- Adopt American Eaton low voltage apparatus and button switch

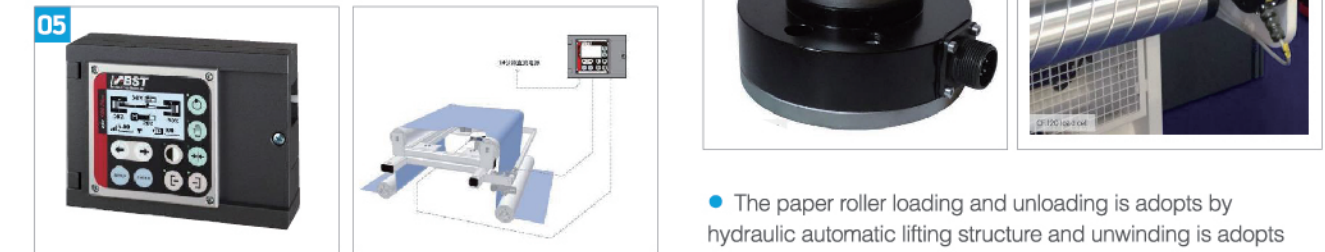


- We are using BST web guiding system to ensure web rectification and keep at correct position. *option
- The paper roller loading and unloading is adopts by hydraulic automatic lifting structure and unwinding is adopts by full-automatic tension control system from W+L Germany to achieve close-loop tension control with load cell. *option




- Handle making and gluing
- Handle feeding and pasting

Configuration:

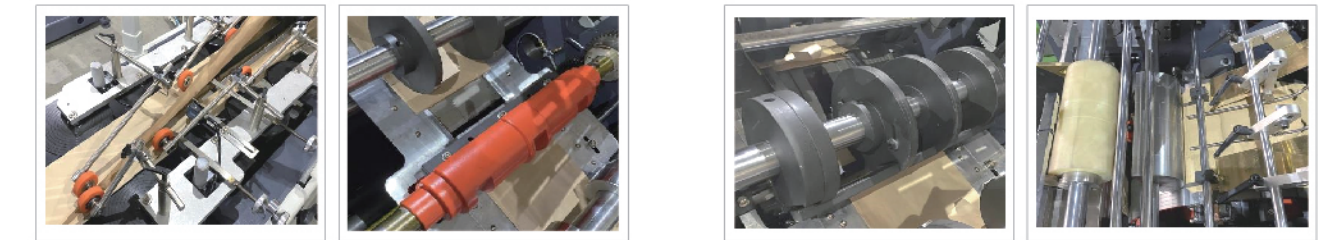

- Tube forming and cutting
- Bottom Creasing and Glue Pasting

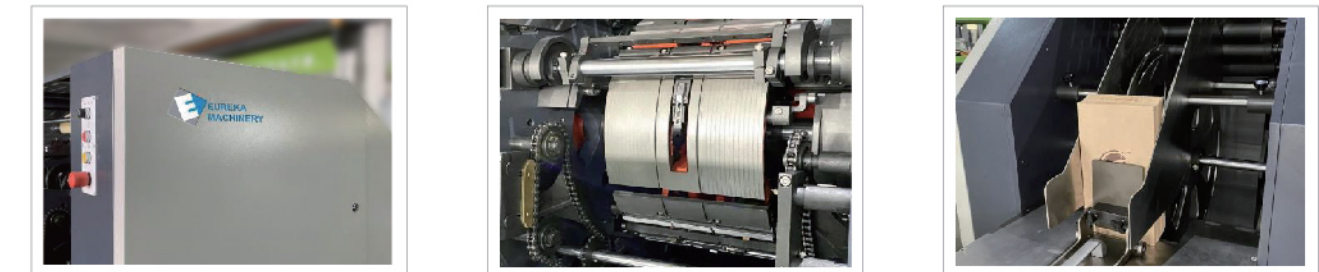

- Paper bag delivery by two methods




No. 188, Fuyuan Road, Fuan Town, Dongtai city, Jiangsu Province, China

Tel: +86 21 62999507 62998061 62986517

Fax: +86 21 62985160

Web: WWW.EUREKA-MACHINERY.COM


EMAIL: INFO@EUREKA-MACHINERY.COM

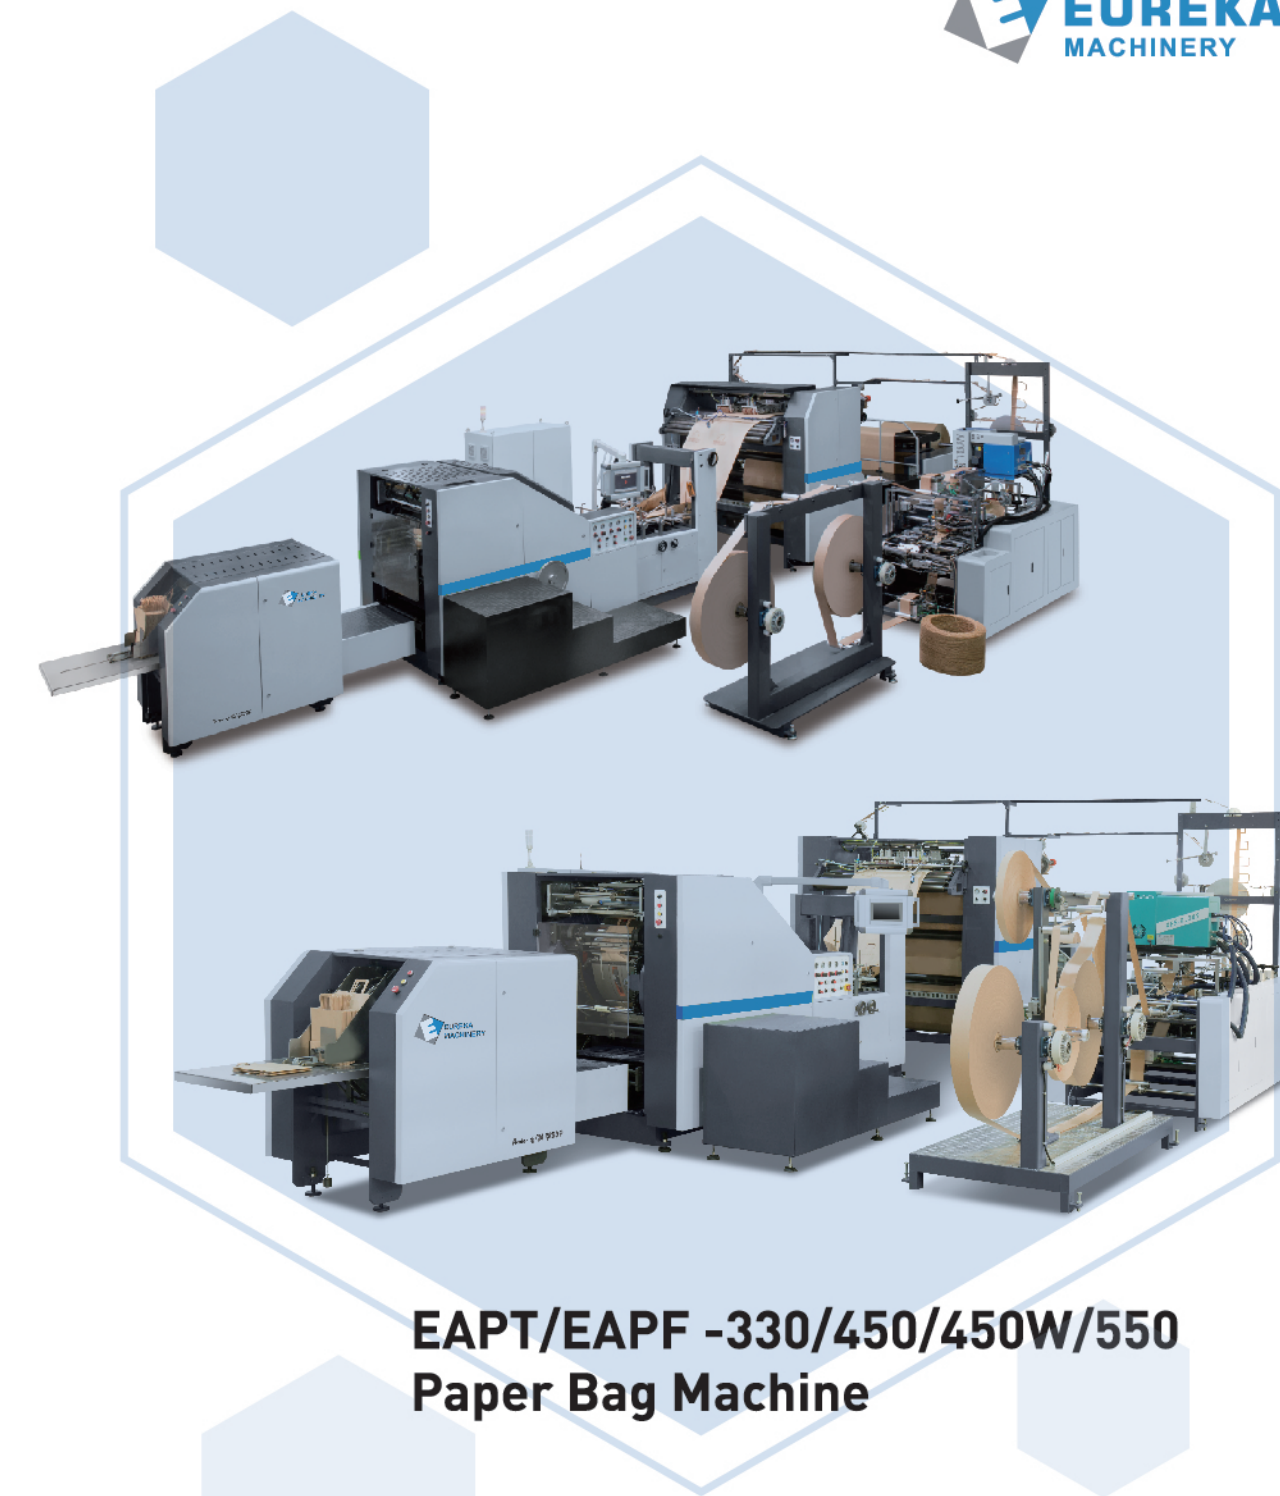

EAPT/EAPF -330/450/450W/550 Paper Bag Machine

Member of GW GROUP


»» EAPT-330/450/450W/550
Automatic Square Bottom Paper Bag Machine with Twist Handle

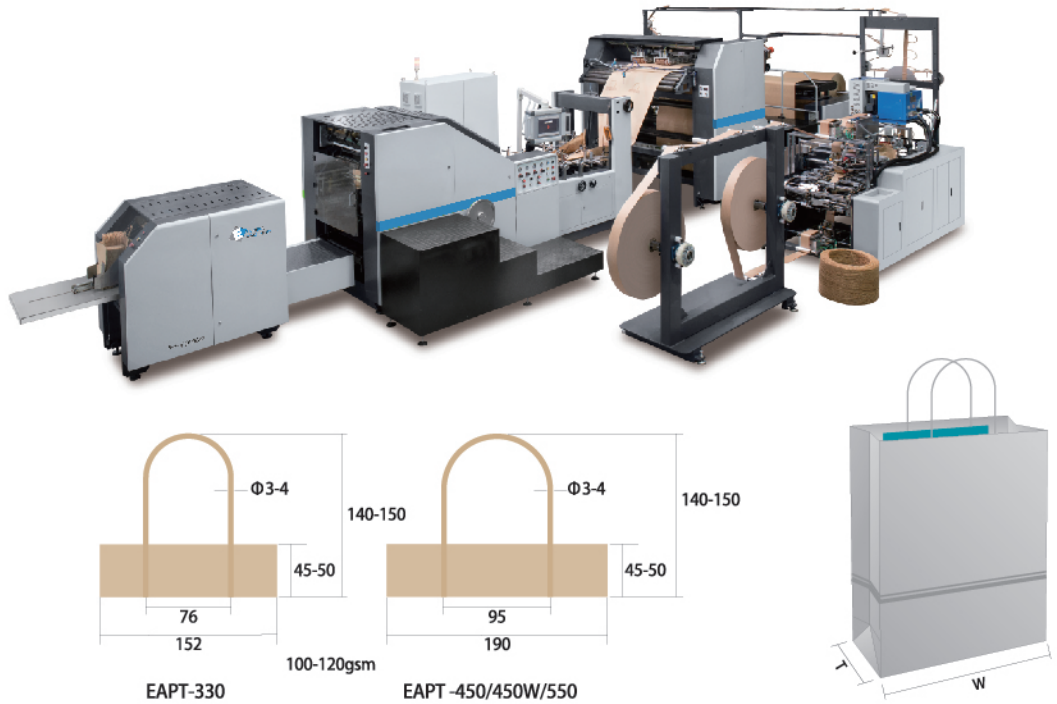

»» Specifications

Model	EAPT-330 / EAPF-330	EAPT-450 / EAPF-450	EAPT-450W / EAPF-450W	EAPT-550 / EAPF-550
Cutting length(without handle)	260-530mm	260-530mm	360-800mm	360-800mm
Cutting length(with handle)	260-430mm	260-430mm	360-700mm	360-700mm
Paper bag width(without handle)	130-330mm	150-450mm	220-450mm	220-550mm
Paper bag width(with handle)	220-330mm	250-450mm	250-450mm	250-550mm
Paper bag bottom width	70-180mm	90-180mm	100-250mm	100-250mm
Paper thickness(without handle)	60-160g/m ²	60-160g/m ²	60-160g/m ²	60-160g/m ²
Paper thickness(with handle)	80-160g/m ²	80-160g/m ²	90-160g/m ²	90-160g/m ²
Twisted handle diameter	3-4mm	3-4mm	3-4mm	3-4mm
Handle patch length	152mm	190mm	190mm	190mm
Handle patch width	45mm	50mm	50mm	50mm
Handle patch thickness	100-120g/m ²	100-120g/m ²	100-120g/m ²	100-120g/m ²
Twisted handle height	140-150mm	140-150mm	140-150mm	140-150mm
Paper roller width	430-1050mm	570-1290mm	670-1430mm	670-1630mm
Max. diameter of paper roller	1200mm	1200mm	1200mm	1200mm
Paper roller inner diameter	76mm	76mm	76mm	76mm
Power	25kw	25kw	30kw	30kw
Machine speed	60-150pcs/min	60-150pcs/min	30-120pcs/min	30-100pcs/min
Air supply	>0.12m ³ /min 0.6MPa	>0.12m ³ /min 0.6MPa	>0.12m ³ /min 0.6MPa	>0.12m ³ /min 0.6MPa
Machine weight	18tons	19.5tons	19.5tons	23tons
Machine dimension(L×W×H)	12000×5400×2600mm	12000×5600×2600mm	13500×5700×2600mm	13500×5700×2600mm

»» EAPF-330/450/450W/550
Automatic Square Bottom Paper Bag Machine with Flat Handle

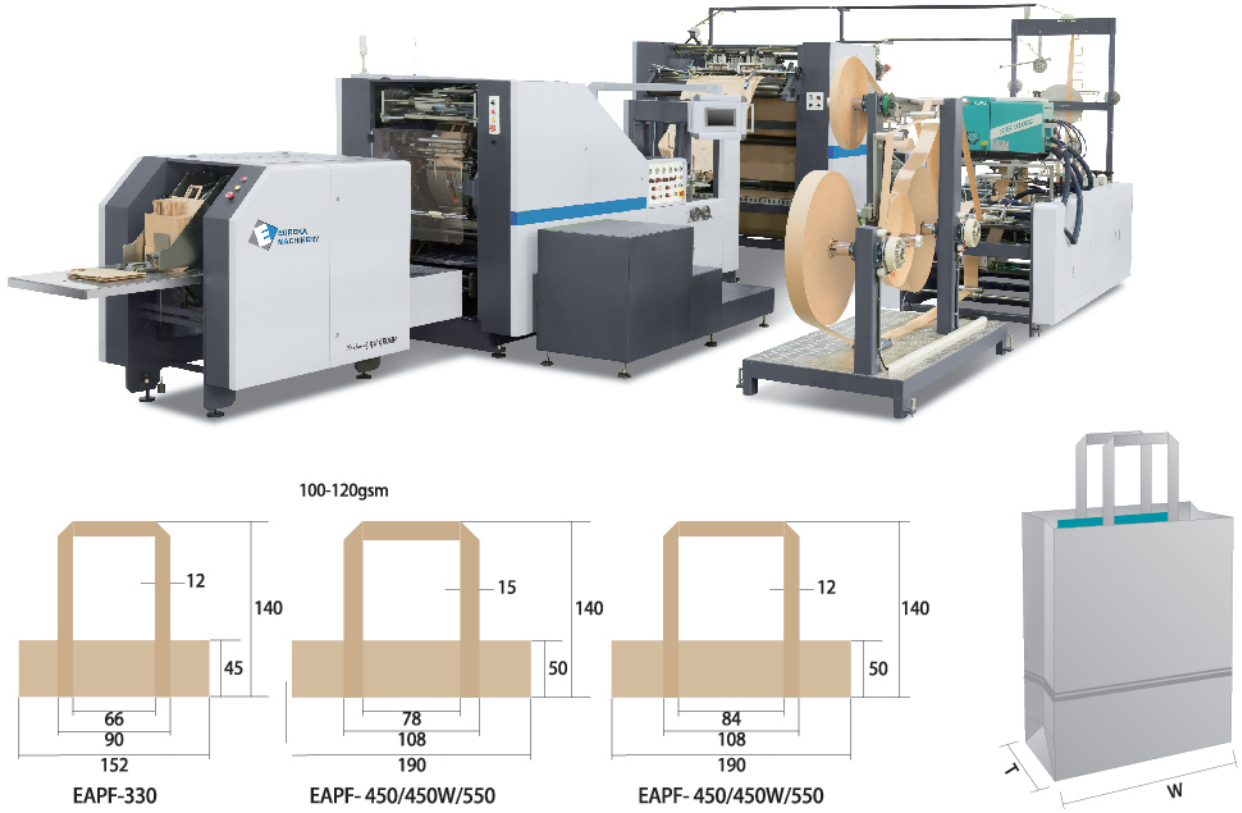

»» EP-330/450/450W/550
Square Bottom Paper Bag Machine




»» Flat bottom paper bag machine



»» Specifications

Model	EJ-250	EJ-350
Bag Making Speed	50-700pcs/min	50-600pcs/min
Maximum Linear Speed	120m/min	110m/min
Paper Bag Length (L)	155-715mm	110-450mm
Paper Bag Width (W)	70-350mm	70-250mm
Insert Size (WS)	20-120mm	20-120mm
Step Height (S)	15/20mm	15/20mm
Paper Thickness	35-80g/m ²	35-80g/m ²
Paper Roll Width	100-960mm	100-760mm
Paper Roll Diameter	200-1000mm	200-1000mm
Inner Diameter Of Paper	76mm	76mm
Film Width	50-240mm	50-240mm
Film Thickness	0.012-0.037mm	0.012-0.037mm
Film Material	OPP/PET	OPP/PET
Film Diameter	500mm	500mm
Inner Diameter of Film	76mm	76mm
Total Power	20KW	10KW
Working Air Source	>0.12m ³ /min 0.6MPa	>0.12m ³ /min 0.6MPa
Total Weight	6500kg	4500kg
Machine Size	L7500×W2300×H1800mm	L6800×W1600×H1600mm

Flexo Printing Machine
Inline optional

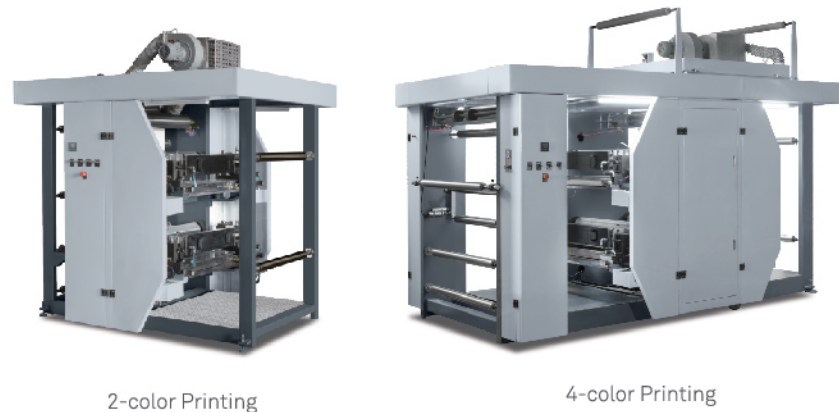

»» Auxiliary Equipment

Offline flexo printing machine



»» Technical parameters

Model	ZYT-1800B	ZYT-1500B	ZYT-1300	ZYT-1200
Max roll width	1800	1500	1300	1200
Max printing width	1760	1460	1260	1160
Max. unwinder diameter	1300			
Max. rewinder diameter	1300			
Printing length range	300-1000mm	300-1000mm	230-1000mm	230-1000mm
Paper thickness	30-200gsm			
Speed	5-100m/min			
Accuracy	≤±0.15mm			
Thickness of plate (including double sides glue)		Default setting is 2.28mm+0.38mm		

»» Technical parameters

Model	EKH-2	EKH-1
Paper Roll Inner Diameter	Φ76 mm(3")	Φ76 mm(3")
Max. Paper Roll Diameter	800mm	800mm
Paper Roll Width	20-1 00mm	20-1 00mm
Paper Thickness	20-60g/m ²	20-60g/m ²
Paper Rope Diameter	Φ2.5-6mm	Φ2.5-6mm
Max. Rope Roll Diameter	300mm	300mm
Max. Paper Rope width	300mm	300mm
Production Speed	30-35m/min	20-25m/min
Total Power	1.5KW/220V 1 phase	1.1 KW/220V 1 phase
Total Weight	650kg	300kg
Machine Dimension	L 2700xW1300xH950mm	L1580xW1200xH950mm

»» Technical parameters


Model	EKH-180
Paper Rope Inner Diameter	Φ76 mm(3")
Inner Diameter of Final Rope Roll	180 mm
Final Rope Reel Diameter	400-600mm
Production Speed	80-150m/min
Total Power	2.2KW/380V 3phase
Total Weight	150kg
Machine Dimension	L1050×W800×H1200mm



EKH-1 Paper rope making machine



EKH-2 Paper rope making machine

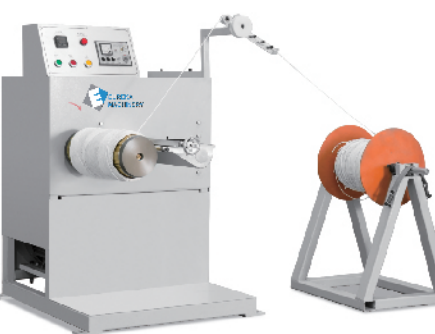

EKH-180 Rope rewinder